


HEAVY DUTY TOGGLES


SWITCH



35-3005
SPST

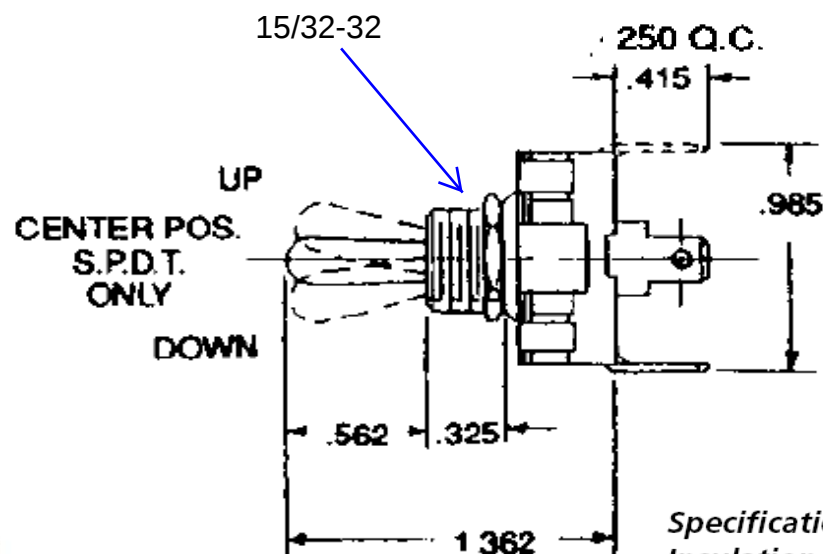

35-3005

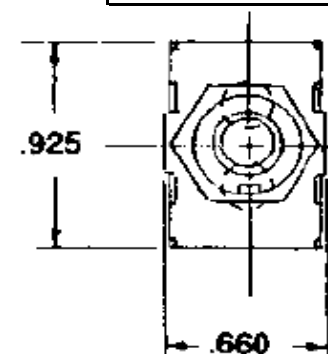

Specifications:

Insulation Resistance: 100 Megohms

Dielectric Strength: 1000V RMS (min.)

Contact Material: Copper Alloy

Terminal Material: Copper Alloy – Brass plated

Temperature Rating: -30°C to 60°C

Electrical Life: 6000 cycles (min.)

.250 Q.C.

ON NONE OFF

CIRCUIT FUNCTION		POLES & THROWS	AMPS 125VAC	AMPS 250VAC	H.P. 125-250 VAC
ON	OFF	SPST	20	10	3/4

ACTUATOR MATERIAL	BUSHING LENGTH	TERMINAL TYPE	HARDWARE
Brass	0.325	Q.C. (.250")	N, KN

